

DATA SHEET

vibro-meter®

TQ402/TQ412, EA402 and IQS900 proximity measurement system

TQ402
(standard mount)



TQ412 (reverse mount)



IQS900



KEY FEATURES AND BENEFITS

- From the vibro-meter® product line
- Non-contact measurement system based on eddy-current principle
- Ex certified versions for use in hazardous areas (potentially explosive atmospheres)
- Conforms to API 670 recommendations
- 1, 5 and 10 m systems
- Temperature-compensated design
- Voltage or current output with protection against short circuits
- Frequency response: DC to 20 kHz (-3 dB)
- Measurement range: 2 or 4 mm
- Temperature range: -40 to +180 °C

APPLICATIONS

- Shaft relative vibration and gap/position measurement chains for machinery protection and/or condition monitoring
- Ideal for use with VM600 and/or VibroSmart® machinery monitoring systems
- API 670 applications

DESCRIPTION

The TQ402/TQ412, EA402 and IQS900 form a proximity measurement system, from Meggitt's vibro-meter® product line. This proximity measurement system allows contactless measurement of the relative displacement of moving machine elements.

TQ4xx-based proximity measurement systems are particularly suitable for measuring the relative vibration and axial position of rotating machine shafts, such as those found in steam, gas and hydraulic turbines, as well as in alternators, turbo-compressors and pumps.



Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.

DESCRIPTION *(continued)*

The system is based around a TQ402 or TQ412 non-contact sensor and an IQS900 signal conditioner. Together, these form a calibrated proximity measurement system in which each component is interchangeable. The system outputs a voltage or a current proportional to the distance between the transducer tip and the target, such as a machine shaft.

The active part of the transducer is a coil of wire that is moulded inside the tip of the device, made of Torton® (polyamide-imide). The transducer body is made of stainless steel. The target material must, in all cases, be metallic.

The transducer body is available with metric or imperial thread. The TQ412 version is intended for reverse-mount applications. Both the TQ402 and TQ412 have an integral coaxial cable, terminated with a self-locking miniature coaxial connector. Various cable lengths (integral and extension) can be ordered.

The IQS900 signal conditioner contains a high-frequency modulator/demodulator that supplies a driving signal to the transducer. This generates the necessary electromagnetic field used to measure the gap. The conditioner circuitry is made of high-quality components and is mounted in a painted aluminium housing.

Note: The IQS900 signal conditioner matches or better the outstanding measurement performance and specifications of the IQS450 signal conditioner, which it replaces. Accordingly, the IQS900 is compatible with all TQ9xx and TQ4xx proximity sensors / measurement chains.

In addition, the IQS900 signal conditioner includes improvements such as: SIL 2 "by design", improved frame-voltage immunity, improved electromagnetic immunity and emissions, smaller output impedance (voltage output), optional diagnostic circuitry (that is, built-in self-test (BIST)), raw output pin, test input pin, new DIN-rail mounting adaptor and removable screw-terminal connectors for easier installation.

The TQ402 and TQ412 transducers can be matched with a single EA402 extension cable to effectively lengthen the front-end. Optional housings, junction boxes and interconnection protectors are available for the mechanical and environmental protection of the connection between the integral and extension cables.

TQ4xx-based proximity measurement systems can be powered by associated machinery monitoring systems such as VM600 cards or VibroSmart® modules, or by another power supply.

For specific applications, contact your local Meggitt representative.

SPECIFICATIONS

Overall proximity measurement system

Operation

Sensitivity

- Ordering option B21 : 8 mV/μm (200 mV/mil)
- Ordering option B22 : 2.5 μA/μm (62.5 μA/mil)
- Ordering option B23 : 4 mV/μm (100 mV/mil)
- Ordering option B24 : 1.25 μA/μm (31.2 μA/mil)

Linear measurement range (typical)

- Ordering option B21 : 0.15 to 2.15 mm, corresponding to a -1.6 to -17.6 V output
- Ordering option B22 : 0.15 to 2.15 mm, corresponding to a -15.5 to -20.5 mA output
- Ordering option B23 : 0.3 to 4.3 mm, corresponding to a -1.6 to -17.6 V output
- Ordering option B24 : 0.3 to 4.3 mm, corresponding to a -15.5 to -20.5 mA output

Linearity

: See **Performance curves on page 7 and on page 8**

Frequency response

: DC to 20 kHz (-3 dB)

Interchangeability of elements

: All components in system are interchangeable

SPECIFICATIONS (continued)

Environmental

Potentially explosive atmospheres

Available in Ex approved versions for use in hazardous locations – TQ402/TQ412 and EA402


| Type of protection Ex i: intrinsic safety (ordering option A2) | | |
|---|-----------------------------------|--|
| Europe | EC type examination certificate | LCIE 11 ATEX 3091 X II 1G (Zones 0, 1, 2) Ex ia IIC T6...T3 Ga |
| International | IECEx certificate of conformity | IECEx LCI 11.0061X Ex ia IIC T6...T3 Ga |
| North America | cCSAus certificate of compliance | cCSAus 1514309 Class I, Divisions 1 and 2, Groups A, B, C, D Ex ia |
| South Korea | KGS certificate of conformity | KGS 15-GA4BO-0664X Ex ia IIC T6 to T3 |
| Russian Federation | EAЭC RU certificate of conformity | EAЭC RU C-CH.AΔ07.B.03003/21 0Ex ia IIC T6...T3 Ga X |
| India | PESO approval certificate* | PESO A/P/HQ/WB/104/5575 (P447944) Ex ia IIC T6...T3 Ga |

| Type of protection Ex nA: non-sparking (ordering option A3) | | |
|--|--|--|
| Europe | Voluntary type examination certificate | LCIE 11 ATEX 1010 X II 3G (Zone 2) Ex nA II T6...T3 Gc |
| International | IECEx certificate of conformity | IECEx LCI 11.0063X Ex nA II T6...T3 Gc |
| North America | cCSAus certificate of compliance | cCSAus 1514309 Class I, Division 2, Groups A, B, C, D |
| Russian Federation | EAЭC RU certificate of conformity** | EAЭC RU C-CH.AΔ07.B.03003/21 2Ex nA II T6...T3 Gc X |

* Not engraved/marked on the products.

** Not engraved/marked on all products.

 **For specific parameters of the mode of protection concerned and special conditions for safe use, refer to the Ex certificates that are available from Meggitt SA.**

 **For the most recent information on the Ex certifications that are applicable to this product, refer to the Ex product register (PL-1511) document that is available from Meggitt SA.**




SPECIFICATIONS *(continued)*

Available in Ex approved versions for use in hazardous areas – IQS9xx (ordering option code A5)

| Protection mode | IQS9xx |
|----------------------|--|
| Europe | |
| ec (Gas) | Ⓔ Ex II 3 G Ex ec IIC T6 or T5 Gc LCIE 21 ATEX 1004 X T6 for +70°C T5 for +85°C |
| ia (Gas) | Ⓔ Ex II 1 G Ex ia IIC T6 or T5 Ga LCIE 21 ATEX 3002 X T6 for +70°C T5 for +85°C |
| ia (Dust) | Ⓔ Ex II 1 D Ex ia IIIC T ₂₀₀ 80°C...T ₂₀₀ 115°C Da LCIE 21 ATEX 3002 X T ₂₀₀ 80°C for +50°C T ₂₀₀ 95°C for +65°C T ₂₀₀ 115°C for +85°C |
| International | |
| ec (Gas) | Ex ec IIC T6 or T5 Gc IECEx LCIE 21.0005X T6 for +70°C T5 for +85°C |
| ia (Gas) | Ex ia IIC T6 or T5 Ga IECEx LCIE 21.0006X T6 for +70°C T5 for +85°C |
| ia (Dust) | Ex ia IIIC T ₂₀₀ 80°C...T ₂₀₀ 115°C Da IECEx LCIE 21.0006X T ₂₀₀ 80°C for +50°C T ₂₀₀ 95°C for +65°C T ₂₀₀ 115°C for +85°C |
| North America | |
| ec (Gas) | <i>Pending</i> |
| ia (Gas) | <i>Pending</i> |
| ia (Dust) | <i>Pending</i> |

SPECIFICATIONS (continued)

| Protection mode | IQS9xx |
|---------------------------|---------|
| South Korea | |
| ec (Gas) | Pending |
| ia (Gas) | Pending |
| ia (Dust) | Pending |
| Russian Federation | |
| ec (Gas) | Pending |
| ia (Gas) | Pending |
| ia (Dust) | Pending |

-  For specific parameters of the mode of protection concerned and special conditions for safe use, refer to the Ex certificates that are available from Meggitt SA.
-  For an IQS9xx signal conditioner with protection mode “Ex” located in an Ex Zone 2, the user must ensure that the IQS9xx is installed in an industrial housing or enclosure that ensures a protection rating of at least IP54 (or equivalent).
-  For the most recent information on the Ex certifications that are applicable to this product, refer to the *Ex product register (PL-1511)* document that is available from Meggitt SA.

Approvals

| | |
|---|---|
| Conformity | : CE marking, European Union (EU) declaration of conformity. EAC marking, Eurasian Customs Union (EACU) certificate/ declaration of conformity. |
| Electromagnetic compatibility | |
| • TQ402/TQ412 and EA402 | : EN 61000-6-2:2005. EN 61000-6-4:2007 + A1:2011. TR CU 020/2011. |
| • IQS900 | : EN 61000-6-2:2005. EN 61000-6-4:2007 + A1:2011. EN 61326-1:2013. EN 61326-3-2:2008 (SIL). |
| Electrical safety | : EN 61010-1:2010 |
| Environmental management | : RoHS compliant (2011/65/EU) |
| Hazardous areas | : Ex approved versions (see Potentially explosive atmospheres starting on page 3) |
| Russian federal agency for technical regulation and metrology (Rosstandart) | : Pattern approval certificate CH.C.28.004.A N° 58976. (Note: TQ402/TQ412 and EA402.) |

Note: Some approvals/certifications are pending.

SPECIFICATIONS *(continued)*

System calibration

| | |
|-------------------------|--------------------------|
| Calibration temperature | : +23°C ±5°C |
| Target material | : VCL 140 steel (1.7225) |

Note: For applications using a non-standard or special target material, performance curves can be generated and supplied. Contact Meggitt SA for further information.

Total system length

The total system length (TSL) is the sum of the length of the TQ4xx transducer's integral cable and the length of the EA40x extension cable. The supported TSLs can be obtained from different combinations of cables.

Total system lengths

- 1 m : 1.0 m integral cable with no extension cable
- 5 m : 0.5 m integral cable + 4.5 m extension cable.
1.0 m integral cable + 4.0 m extension cable.
1.5 m integral cable + 3.5 m extension cable.
2.0 m integral cable + 3.0 m extension cable.
5.0 m integral cable with no extension cable.
- 10 m : 0.5 m integral cable + 9.5 m extension cable.
1.0 m integral cable + 9.0 m extension cable.
1.5 m integral cable + 8.5 m extension cable.
2.0 m integral cable + 8.0 m extension cable.
5.0 m integral cable + 5.0 m extension cable.
10.0 m integral cable with no extension cable.

Note: The combination of cables selected for a particular total system length depends on the application. For example, to obtain the optimum location for the separation between the integral and extension cables or to eliminate the requirement for an extension cable.

Total system length trimming

Due to the characteristics of the coaxial cable, an "electrical trimming" of the nominal length of extension cables is necessary to optimize the system performance and the transducer interchangeability.


| | |
|----------------------------------|-----------------|
| TSL for a 1 m measurement chain | : 0.9 m minimum |
| TSL for a 5 m measurement chain | : 4.4 m minimum |
| TSL for a 10 m measurement chain | : 8.8 m minimum |

SPECIFICATIONS (continued)

Performance curves for TQ402 or TQ412 with IQS900 – 2 mm measurement range

Typical gap error (μm)
(Referenced to 8 mV/ μm
(2.5 $\mu\text{A}/\mu\text{m}$) line)

Typical sensitivity error
(Referenced to 8 mV/ μm
(2.5 $\mu\text{A}/\mu\text{m}$))

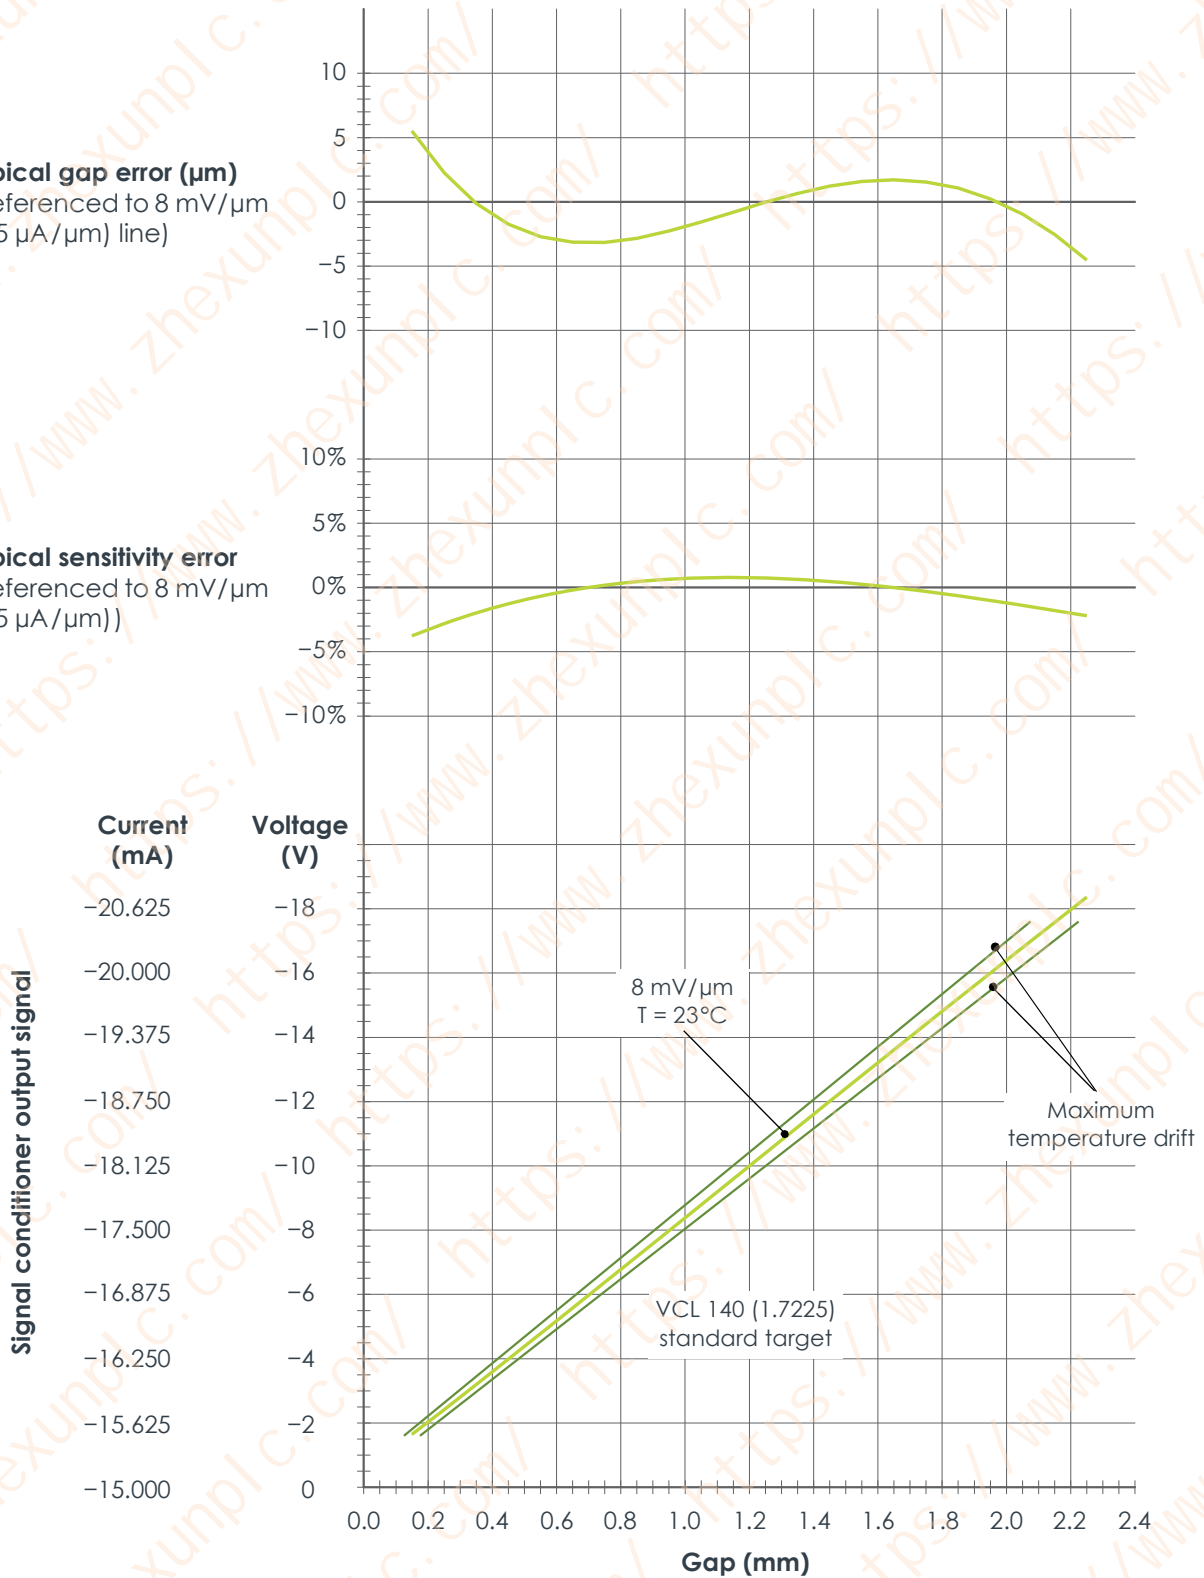


Proximity transducer: TQ402 or TQ412
 Signal conditioner: IQS900 (ordering option code B21 or B22)
 Standard target material: VCL 140 (1.7225)
 Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140

SPECIFICATIONS (continued)

Performance curves for TQ402 or TQ412 with IQS900 – 4 mm measurement range

Typical gap error (μm)
(Referenced to 4 mV/ μm
(1.25 $\mu\text{A}/\mu\text{m}$) line)

Typical sensitivity error
(Referenced to 4 mV/ μm
(1.25 $\mu\text{A}/\mu\text{m}$))

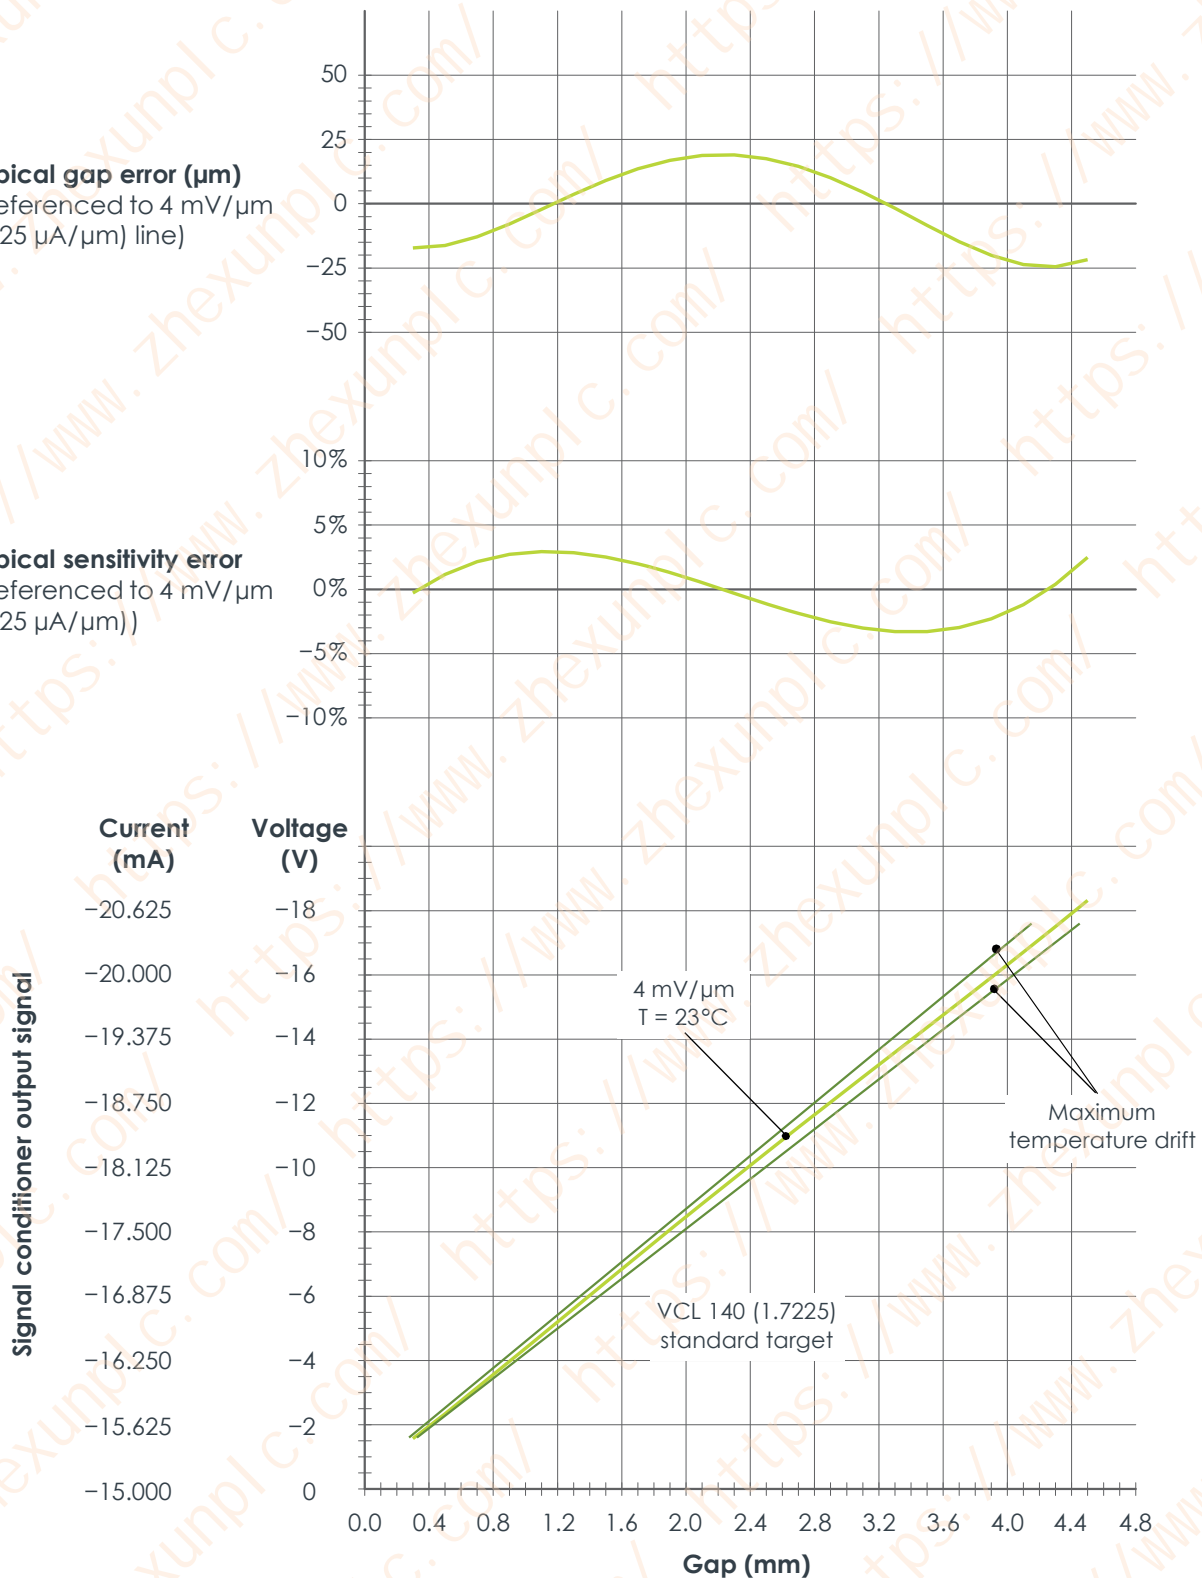

Proximity transducer: TQ402 or TQ412
 Signal conditioner: IQS900 (ordering option code B23 or B24)
 Standard target material: VCL 140 (1.7225)
 Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140

SPECIFICATIONS *(continued)*

TQ402 and TQ412 proximity transducers and EA402 extension cable

General

Transducer input requirements : High-frequency power source from an IQS900 signal conditioner

Environmental

Temperature ranges

- Transducer : -40 to +180°C with drift <5% (operating).
+180 to +220°C with drift >5% (short-term survival).

- Transducer and cable : **-40 to +195°C if used in an Ex Zone**

- Cable, connector and optional protection : -40 to +200°C

Protection rating (according to IEC 60529) : The head of the proximity transducer (transducer tip and integral cable) is rated IP68

Vibration (according to IEC 60068-2-26) : 5 g peak between 10 and 500 Hz

Shock acceleration (according to IEC 60068-2-27) : 15 g peak (half sine-wave, 11 ms duration)

Physical characteristics

Transducer construction : Wire coil Ø8 mm, Torlon (polyamide-imide) tip, encapsulated in stainless steel body (AISI 316L) with high-temperature epoxy glue

Integral and extension cables : FEP covered 70 Ω coaxial cable, Ø3.6 mm

Connectors : Self-locking miniature coaxial connectors.
Note: When connecting, these should be hand-tightened until locked.

Optional protection

- *Flexible stainless steel hose (protection tube)* : The stainless steel hose provides additional mechanical protection but is not leak-tight
- *FEP sheath (extruded fluorinated ethylene propylene)* : The FEP sheath provides resistance to almost all chemicals and low permeability to liquids, gases and moisture. It is also flexible, low friction and mechanically tough.

SPECIFICATIONS (continued)

IQS900 signal conditioner

Current output (2-wire signal transmission)

| | |
|----------------------------|---|
| Current at min. / max. gap | : -15.5 mA / -20.5 mA |
| Measurement range | : 5 mA (corresponding to 2 or 4 mm) |
| Output sensitivity | : See Operation on page 2 and IQS900 signal conditioner on page 16 |
| Nominal output signal | |
| • Without diagnostics | : -15.5 to -20.5 mA |
| • With diagnostics | : -15.5 to -20.5 mA indicates normal operation. Other current values (>-15.5 or <-20.5 mA) indicate a problem with the measurement chain (sensor, cabling and/or signal conditioner). |
| Output impedance | : >60 k Ω . Note: Recommended monitoring system input impedance: ≤ 350 Ω . |

Voltage output (3-wire signal transmission)

| | |
|---------------------------------|---|
| Voltage at min. / max. gap | : -1.6 V / -17.6 V |
| Measurement range | : 16 V (corresponding to 2 or 4 mm) |
| Output sensitivity | : See Operation on page 2 and IQS900 signal conditioner on page 16 |
| Nominal output signal | |
| • Without diagnostics | : -1.6 to -17.6 V |
| • With diagnostics | : -1.6 to -17.6 V indicates normal operation. Other current values (>-1.6 or <-17.6 V) indicate a problem with the measurement chain (sensor, cabling and/or signal conditioner). |
| Output impedance (small signal) | : <100 Ω at DC. <300 Ω at 20 kHz. Note: Recommended monitoring system input impedance: ≥ 50 k Ω . The low output impedance enables operation with a wider range of galvanic separation units / safety barriers, without loss of performance. For example, an IQS900 (output impedance 100 Ω) connected to a third-party galvanic isolator (input impedance 10 k Ω) will see 1% max. signal loss due to impedance matching. |
| Protection | : Short-circuit (35 mA), overvoltage (-33 V _{DC} typical) |
| Output voltage swing | : -0.05 to -22.5 V with a 50 k Ω load and a -24 V _{DC} power supply. -0.05 to -21.5 V with a 10 k Ω load and a -24 V _{DC} power supply. |

Raw output (RAW/COM)

| | |
|----------------------|---|
| Output voltage range | : -0.8 to -8.8 V (nominal) |
| Output impedance | : <15 k Ω up to 20 kHz. <10 k Ω for DC measurement. Note: Recommended test equipment input impedance: >1 M Ω . |
| Protection | : Short-circuit, overvoltage (-33 V _{DC} typical) |

Test input (TEST/COM)

| | |
|---------------------|--|
| Input voltage range | : ± 0.1 to 4.0 V _{PK-PK} (nominal), depending on the measured gap (DC) |
| Input impedance | : 500 k Ω . Note: Recommended test equipment output impedance: >5 k Ω . |
| Protection | : Overvoltage (-33 V _{DC} typical) |

SPECIFICATIONS *(continued)*

Power supply (to IQS900)

Input voltage range

- With a current output signal (2-wire signal transmission) : -18 to -30 V_{DC} (nominal)
- With a voltage output signal (3-wire signal transmission) : -19 to -30 V_{DC} (nominal)

Current consumption (with nominal 24 V_{DC} supply) : 25 mA max.

Overvoltage protection (diode) : -33 V_{DC} typical

Note: The IQS900 should be powered (energised) using a limited-power, low-voltage power supply such as a sensor power supply output provided a VM600 or VibroSmart[®] monitoring and/or protection system, a GSI127 galvanic separation unit or other suitable power supply.

In safety-related applications, an IQS900 must be powered using a limited-power, low-voltage power supply with a safe limitation of -30 V_{DC} (nominal), even in the event of a single fault with the power supply.

Environmental

Temperature

- Operating and storage : -40 to 85°C (-40 to 185°F)

Humidity : 0 to 95%, non-condensing

Protection rating : IP20.

(according to IEC 60529)

Note: The IQS900 is suitable for indoor use only unless it is installed in an industrial housing or enclosure that ensures a higher level of environmental protection.

Flammability : UL94 V-0

Vibration : 5 g peak between 10 and 500 Hz

(according to IEC 60068-2-6)

Shock acceleration : 15 g peak (half sine-wave, 11 ms duration)

(according to IEC 60068-2-27)

Connectors

Self-locking miniature coaxial connector (bidirectional) : 1 contact for sensor-side signal: sensor (connects to TQ9xx sensor or EA902 cable)

Screw-terminal connector (input) : 4 contacts for test signals: raw output (RAW/COM) and test input (TEST/COM)

Screw-terminal connector (output) : 4 contacts for monitor-side signals: measurement output (O/P/COM) and power supply input (-24V/COM)

Screw-terminal connectors

- Clamping range (min. to max.) : 0.2 to 1.5 mm² (24 to 16 AWG)
- Tightening torque (min. to max.) : 0.2 to 0.25 N•m (0.15 to 0.18 lb-ft)

Note: The IQS900 features removal screw-terminal connectors that can unplugged from the main body of its housing to simplify installation and mounting.


SPECIFICATIONS *(continued)*

Physical characteristics

| | |
|--|--|
| Electrical connections | : Self-locking miniature coaxial connector and removable screw-terminal connectors (see Connectors on page 11) |
| Housing material | : Injection-moulded aluminium, painted |
| Dimensions | : See Mechanical drawings and ordering information on page 16 |
| Weight | : 200 g (0.44 lb) approx. |
| Mounting | |
| • Without DIN-rail mounting adaptor | : Two M4 screws |
| • With DIN-rail mounting adaptor (ordering option code G2) | : MA130 DIN-rail mounting adaptor for IPC707 and IQS900 signal conditioners. Suitable for TH 35 DIN rails (according to EN 50022 / IEC 60715). For example, TH 35-7.5 or TH 35-15. See Accessories on page 17 . |

MECHANICAL DRAWINGS AND ORDERING INFORMATION

TQ402 proximity transducer

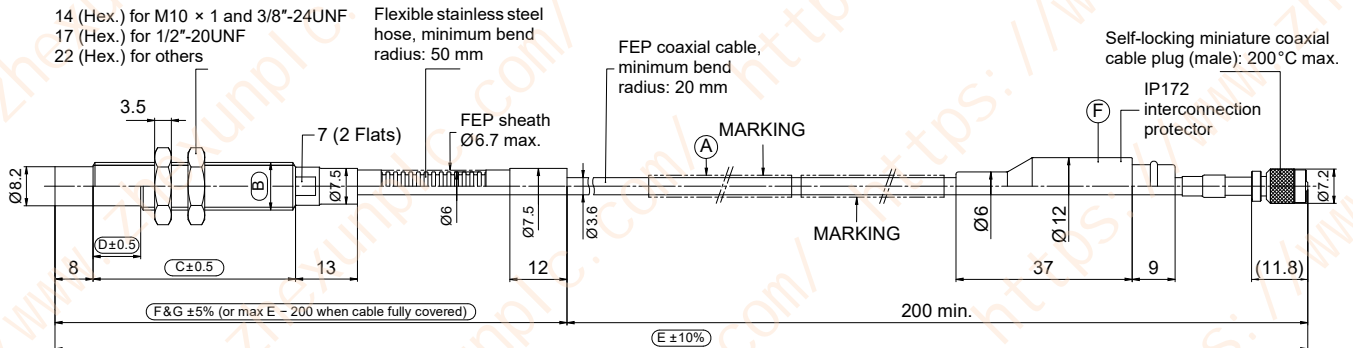

Ordering number:

111 - 402 - 000 - 013 - **A** - **B** - **C** - **D** - **E** - **F** - **G** - **H**

| Environment (A) | |
|-----------------|---|
| Standard | 1 |
| Explosive Ex i | 2 |
| Explosive Ex nA | 3 |

| Body thread (B) | |
|-----------------|---|
| M10 × 1 | 1 |
| M14 × 1.5 | 2 |
| M16 × 1.5 | 3 |
| 3/8"-24UNF | 6 |
| 5/8"-18UNF | 7 |
| 1/2"-20UNF | 8 |

| Body length (C) | |
|------------------------------|-----|
| Each 1 mm, from 20 to 250 mm | |
| 20 mm min. | 020 |
| 250 mm max. | 250 |

| Unthreaded length (D) | |
|-----------------------------|-----|
| Each 1 mm, from 0 to 230 mm | |
| 0 mm min. | 000 |
| 230 mm max. | 230 |

| Integral cable length (E) | |
|---------------------------|-----|
| 0.5 m ±50 mm | 005 |
| 1.0 m ±100 mm | 010 |
| 1.5 m ±150 mm | 015 |
| 2.0 m ±200 mm | 020 |
| 5.0 m ±500 mm | 050 |
| 10 m ±1000 mm | 100 |

| Total system length (H) | |
|-------------------------|------|
| See note 2 | |
| 01 | 1 m |
| 05 | 5 m |
| 10 | 10 m |

| Flexible hose length (G) | |
|--|------------|
| See note 1 | |
| Each 0.1 m, from 0 to 9.8 m. G min. = C + 100 mm. | |
| 000 | None |
| 001 | 0.1 m min. |
| 098 | 9.8 m max. |

| Optional protection (F) | |
|-------------------------|--|
| See note 1 | |

| | Cable | Connector |
|---|---------------------------------------|-----------|
| 0 | None | None |
| 1 | Flexible hose | None |
| 2 | Flexible hose with FEP sheath | None |
| 3 | Movable flexible hose | None |
| 4 | Movable flexible hose with FEP sheath | None |
| 5 | None | IP172 |
| 6 | Flexible hose | IP172 |
| 7 | Flexible hose with FEP sheath | IP172 |
| 8 | Movable flexible hose | IP172 |
| 9 | Movable flexible hose with FEP sheath | IP172 |


Notes

All dimensions are in mm unless otherwise stated.

- When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered:
Flexible hose length (G) min. = Body length (C) + 100 mm.
Flexible hose length (G) max. = Integral cable length (E) - 200 mm, for an integral cable that is protected to the maximum extent possible ("cable fully covered").
- The Total system length (H) = TQ402 integral cable length (E) + EA402 extension cable length.
For information on combining integral and extension cables to obtain a particular total system length, see **Total system length on page 6**.
For information on cable length tolerances, see **Total system length trimming on page 6**.

MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

TQ412 proximity transducer

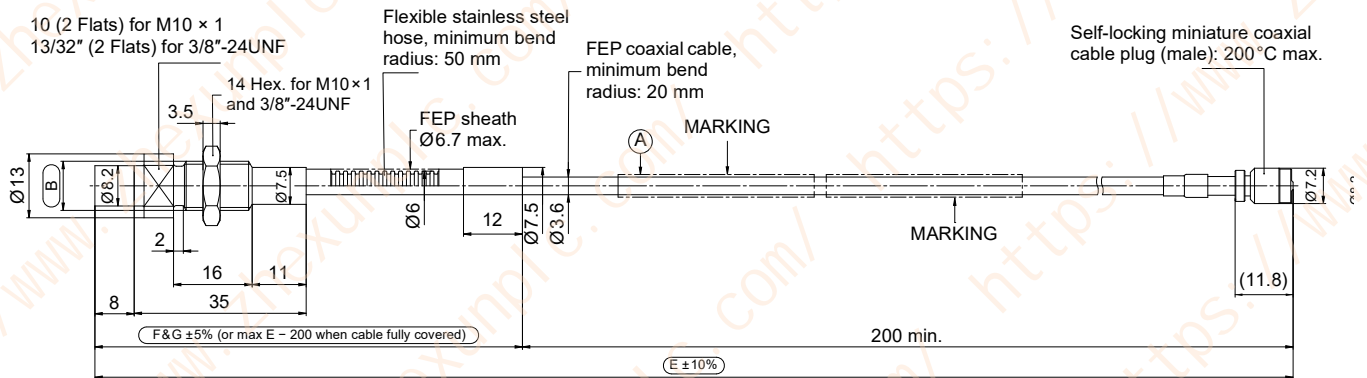

Ordering number: 111 - 412 - 000 - 013 - A - B - E - F - G - H

| Environment (A) | |
|-----------------|---|
| Standard | 1 |
| Explosive Ex i | 2 |
| Explosive Ex nA | 3 |

| Body thread (B) | |
|-----------------|---|
| M10 × 1 | 1 |
| 3/8"-24UNF | 6 |

| Total system length (H) | |
|-------------------------|------|
| See note 2 | |
| 01 | 1 m |
| 05 | 5 m |
| 10 | 10 m |

| Integral cable length (E) | |
|---------------------------|-----|
| 0.5 m ± 50 mm | 005 |
| 1.0 m ± 100 mm | 010 |
| 1.5 m ± 150 mm | 015 |
| 2.0 m ± 200 mm | 020 |
| 5.0 m ± 500 mm | 050 |
| 10 m ± 1000 mm | 100 |

| Optional protection (F) | |
|---------------------------------------|---|
| See note 1 | |
| None | 0 |
| Flexible hose | 1 |
| Flexible hose with FEP sheath | 2 |
| Movable flexible hose | 3 |
| Movable flexible hose with FEP sheath | 4 |

| Flexible hose length (G) | |
|-----------------------------|------------|
| See note 1 | |
| Each 0.1 m, from 0 to 9.8 m | |
| 000 | None |
| 001 | 0.1 m min. |
| 098 | 9.8 m max. |

Notes

All dimensions are in mm unless otherwise stated.

1. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered:
Flexible hose length (G) max. = Integral cable length (E) - 200 mm, for an integral cable that is protected to the maximum extent possible ("cable fully covered").


2. The Total system length (H) = TQ412 integral cable length (E) + EA402 extension cable length.

For information on combining integral and extension cables to obtain a particular total system length, see

Total system length on page 6. For information on cable length tolerances, see **Total system length trimming on page 6.**

MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

EA402 extension cable

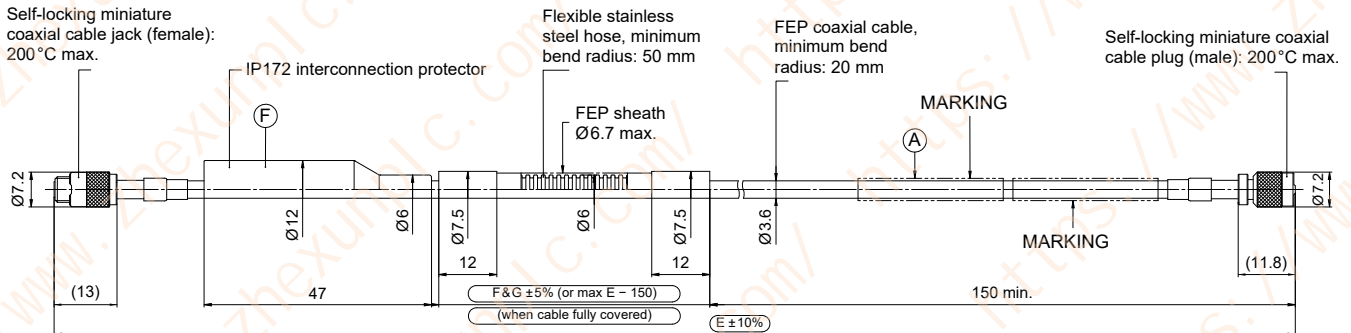

Ordering number: 913 - 402 - 000 - 013 - **A** - **E** - **F** - **G**

| Environment (A) | |
|-----------------|---|
| Standard | 1 |
| Explosive Ex i | 2 |
| Explosive Ex nA | 3 |

| Flexible hose length (G) | |
|-----------------------------|------------|
| Each 0.1 m, from 0 to 9.3 m | |
| 000 | None |
| 001 | 0.1 m min. |
| 093 | 9.3 m max. |

| Extension cable length (E) | |
|----------------------------|-----|
| See note 1 | |
| 3.0 m ±300 mm | 030 |
| 3.5 m ±350 mm | 035 |
| 4.0 m ±400 mm | 040 |
| 4.5 m ±450 mm | 045 |
| 5.0 m ±500 mm | 050 |
| 8.0 m ±800 mm | 080 |
| 8.5 m ±850 mm | 085 |
| 9.0 m ±900 mm | 090 |
| 9.5 m ±950 mm | 095 |

| Optional protection (F) | | |
|-------------------------------|-----------|---|
| See note 2 | | |
| Cable | Connector | |
| None | None | 0 |
| Flexible hose | None | 1 |
| Flexible hose with FEP sheath | None | 2 |
| None | IP172 | 5 |
| Flexible hose | IP172 | 6 |
| Flexible hose with FEP sheath | IP172 | 7 |

Notes

All dimensions are in mm unless otherwise stated.

1. The total system length = TQ402 or TQ412 integral cable length + EA402 extension cable length (E).

For information on combining integral and extension cables to obtain a particular total system length, see

Total system length on page 6. For information on cable length tolerances, see **Total system length trimming on page 6.**

2. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered:



Flexible hose length (G) max. = EA402 extension cable length (E) - 150 mm, for an extension cable that is protected to the maximum extent possible ("cable fully covered").

MECHANICAL DRAWINGS AND ORDERING INFORMATION *(continued)*


IQS900 signal conditioner

Side and top views

Note: All dimensions in mm (in) unless otherwise stated.

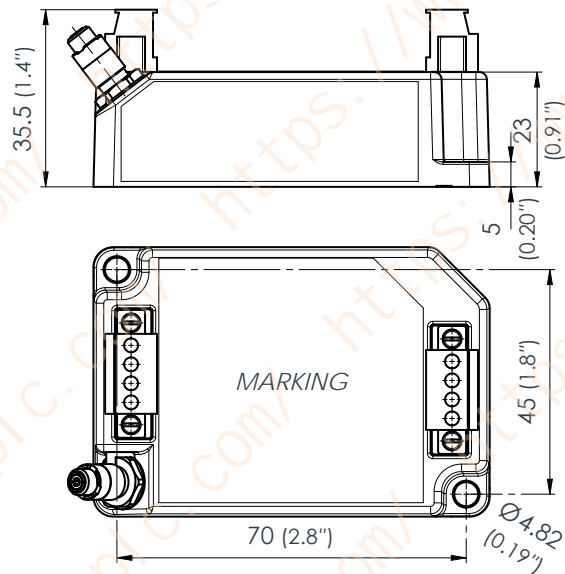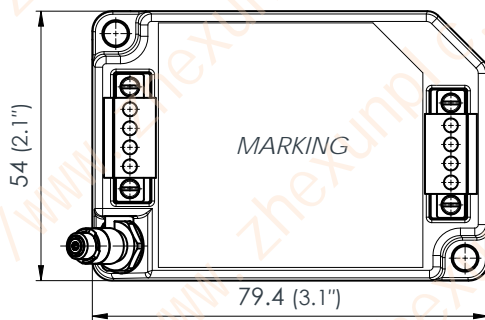

Side and end views with DIN-rail mounting adaptor (ordering option code G2)

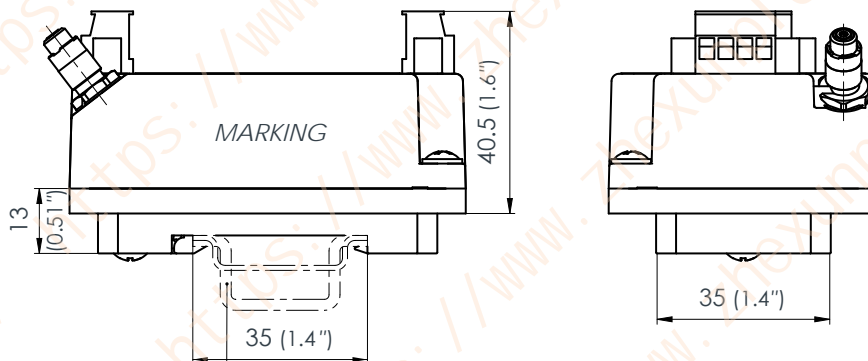

IQS900 mounted on MA130 DIN-rail adaptor

Ordering number: 204 - 900 - 000 - 011 - **A** - **B** - **C** - **H** - **I**

| Environment (A) ¹ | |
|------------------------------|---|
| Standard | 1 |
| Explosive (Ex) | 5 |

| Measurement range | Sensitivity (B) | |
|-------------------|-----------------|----|
| 2 mm | 8 mV/μm | 21 |
| | 2.5 μA/μm | 22 |
| 4 mm | 4 mV/μm | 23 |
| | 1.25 μA/μm | 24 |

| Diagnostics (C) ² | |
|------------------------------|---|
| Without diagnostics | 1 |
| With diagnostics (SIL) | 2 |

| Total system length (H) | |
|-------------------------|----|
| 1 m | 01 |
| 5 m | 05 |
| 10 m | 10 |

| Installation (I) | |
|-------------------------------|---|
| Without DIN-rail adaptor | 0 |
| With DIN-rail adaptor (MA130) | 1 |

Notes
See following page.

MECHANICAL DRAWINGS AND ORDERING INFORMATION *(continued)*

IQS900 signal conditioner *(continued)*

Notes

- Ordering option code **A5** ("Ex") specifies an IQS900 signal conditioner suitable for use in hazardous areas.
 - For an IQS900 signal conditioner with protection mode "Ex" located in an Ex Zone 2, the user must ensure that the IQS900 is installed in an industrial housing or enclosure that ensures a protection rating of at least IP54 (or equivalent).
- Ordering option code **C** specifies an IQS900 signal conditioner either without diagnostics (**C1**) or with diagnostics (**C2**):
 - An IQS900 signal conditioner without diagnostics (**C1**) is similar to the IQS45x, which it replaces. The IQS900 is a form, fit and functionally equivalent replacement that matches or better the measurement specifications of the IQS45x.
 - An IQS900 signal conditioner with diagnostics (**C2**) includes optional diagnostic circuitry that automatically detects and remotely indicates problems with the measurement chain (sensor, cabling and/or the IQS900 itself). An IQS900 with diagnostics is certified SIL 2 (IEC 61508) and PL c Cat 1 (ISO 13849) "by design" to more easily meet the requirements of safety-related applications. Contact Meggitt SA for further information.

ACCESSORIES

| | | |
|--------|------------------------------------|--------------------------------------|
| ABA17x | Industrial housings | : Refer to corresponding data sheet |
| IP172 | Interconnection protection | : Refer to corresponding data sheet |
| JB118 | Junction box | : Refer to corresponding data sheet |
| KS107 | Flexible conduit (protection tube) | : Refer to corresponding data sheet |
| MA130 | Mounting adaptor | : See below |
| PA15x | Probe mounting adaptors | : Refer to corresponding data sheets |
| SG1xx | Cable feedthroughs | : Refer to corresponding data sheets |


ACCESSORIES (continued)

MA130 DIN-rail mounting adaptor


DIN-rail mounting kit for IPC707 and IQS900 signal conditioners

DIN-rail mounting clip.
Material: Polyamide (PA 66 GF 30).


DIN-rail adaptor for TH 35 DIN rails.
Compatibility: TH 35-7.5 and TH 35-15.

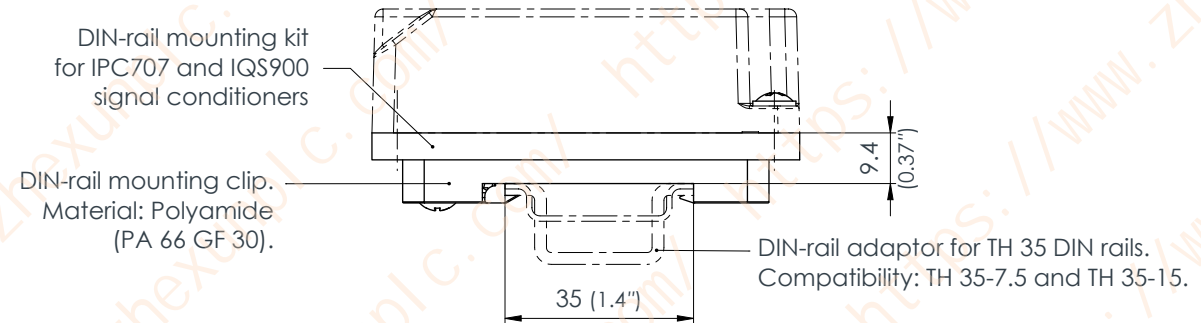

2 × self-tapping cross-head (Phillips) screws.
Type: Pan-head PT® screws, H drive, 4 × 10, A2 (304) stainless steel.
Mounting torque: 0.6 N•m (0.44 lb-ft).

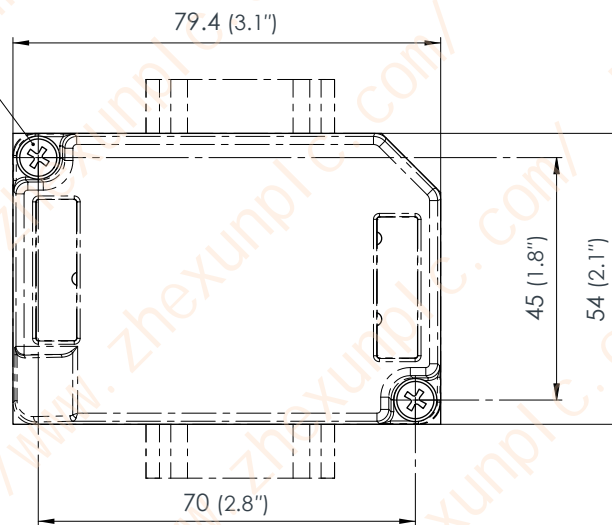

3 × self-tapping cross-head (Phillips) screws.
Type: Pan-head PT® screws, H drive, 4 × 10, A2 (304) stainless steel.
Mounting torque: 0.6 N•m (0.44 lb-ft).

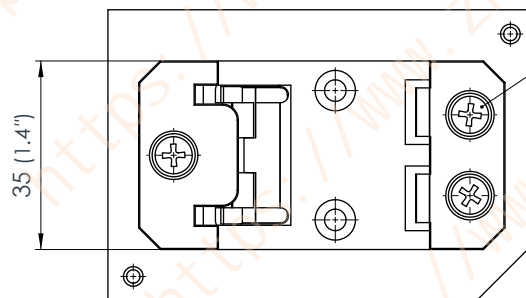

Note: All dimensions in mm (in) unless otherwise stated.

Ordering number (PNR): 809-130-000-021

RELATED PRODUCTS

| | | |
|-------------------------------|--|-------------------------------------|
| TQ401, EA401 and IQS450 | Proximity measurement system (2 mm measurement range) | : Refer to corresponding data sheet |
| TQ403, EA403 and IQS450 | Proximity measurement system (12 mm measurement range) | : Refer to corresponding data sheet |
| TQ422/TQ432, EA402 and IQS450 | Proximity measurement system (2 or 4 mm measurement range, high-pressure applications) | : Refer to corresponding data sheet |
| TQ423, EA403 and IQS450 | Proximity measurement system (12 mm measurement range, high-pressure applications) | : Refer to corresponding data sheet |
| TQ442, EA402 and IQS450 | Proximity measurement system (2 or 4 mm measurement range, right-angle (90°) mount) | : Refer to corresponding data sheet |
| PA150 | Probe mounting adaptor with proximity measurement system | : Refer to corresponding data sheet |
| TQ902/TQ912, EA902 and IQS900 | Proximity measurement chain (2 or 4 mm measurement range) | : Refer to corresponding data sheet |

Meggitt (Meggitt PLC) is a leading international engineering company, headquartered in England, that designs and delivers high-performance components and subsystems for aerospace, defence and selected energy markets. Meggitt comprises four customer-aligned divisions: Airframe Systems, Engine Systems, Energy & Equipment and Services & Support.

The Energy & Equipment division includes the Energy Sensing and Controls product group that specialises in sensing and monitoring solutions for a broad range of energy infrastructure, and control valves for industrial gas turbines, primarily for the Power Generation, Oil & Gas and Services markets. Energy & Equipment is headquartered in Switzerland (Meggitt SA) and incorporates the vibro-meter® product line, which has over 65 years of sensor and systems expertise and is trusted by original equipment manufacturers (OEMs) globally.



All information in this document, such as descriptions, specifications, drawings, recommendations and other statements, is believed to be reliable and is stated in good faith as being approximately correct, but is not binding on Meggitt (Meggitt SA) unless expressly agreed in writing. Before acquiring and/or using this product, you must evaluate it and determine if it is suitable for your intended application. You should also check our website at www.meggittsensing.com/energy for any updates to data sheets, certificates, product drawings, user manuals, service bulletins and/or other instructions affecting the product.

Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with use of the product. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA. Meggitt (Meggitt SA) takes no responsibility for any statements related to the product which are not contained in a current Meggitt SA publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored and produced by Meggitt SA.

The certifications and warranties applicable to the products supplied by Meggitt SA are valid only for new products purchased directly from Meggitt SA or from an authorised distributor of Meggitt SA.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890.

Copyright© 2021 Meggitt SA. All rights reserved. The information contained in this document is subject to change without prior notice.

Sales offices

Meggitt has offices in more than 30 countries. For a complete list, please visit our website.



Local representative

Head office

Meggitt SA
Route de Moncor 4
Case postale
1701 Fribourg
Switzerland
Tel: +41 26 407 11 11
Fax: +41 26 407 13 01
energy@ch.meggitt.com
www.meggittsensing.com/energy
www.meggitt.com